






DOSING PUMPS & SYSTEMS

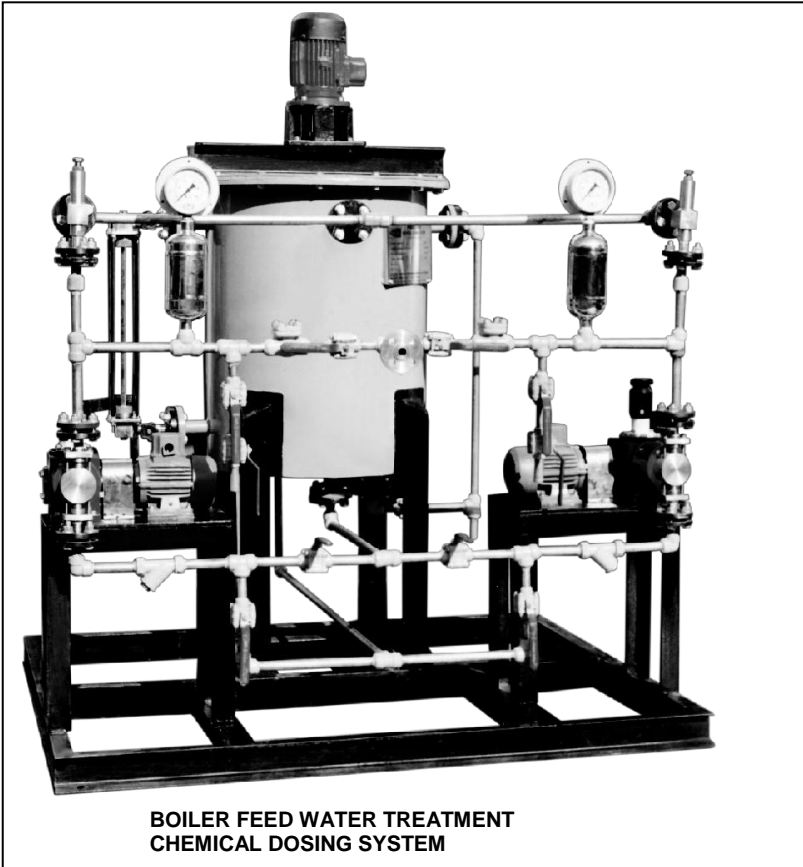


**BOILER FEED WATER TREATMENT
CHEMICAL DOSING SYSTEM**

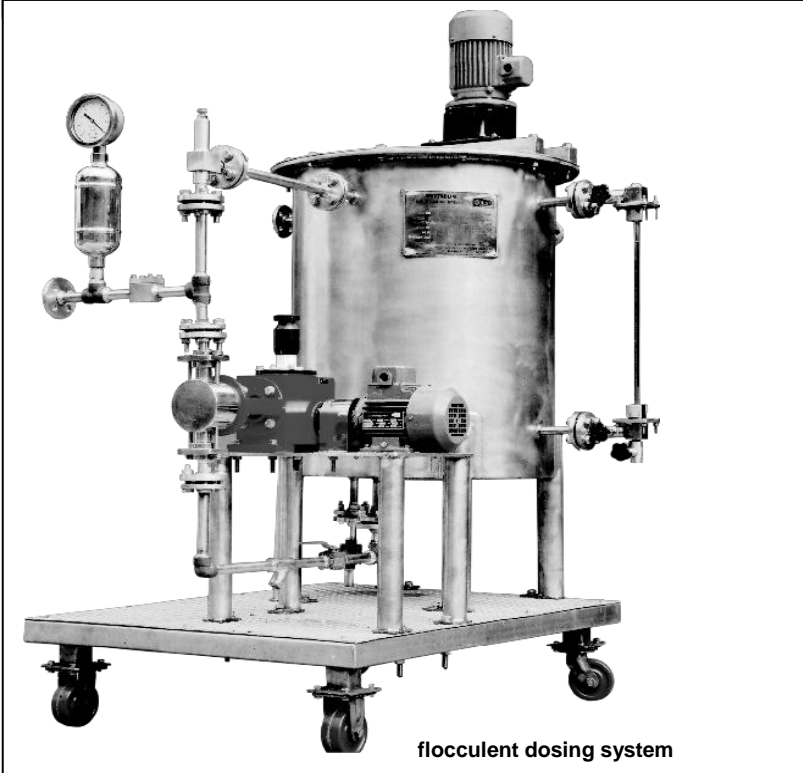


flocculent dosing system

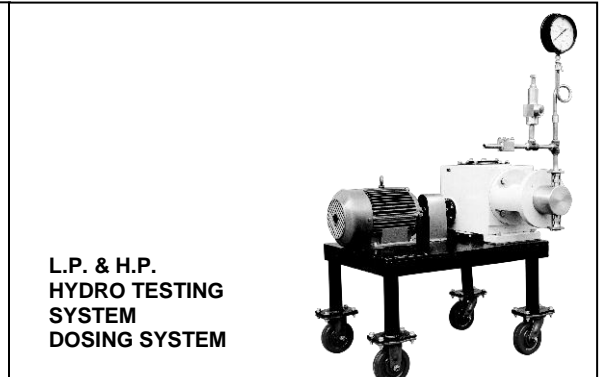


**L.P. & H.P.
HYDRO TESTING
SYSTEM
DOSING SYSTEM**

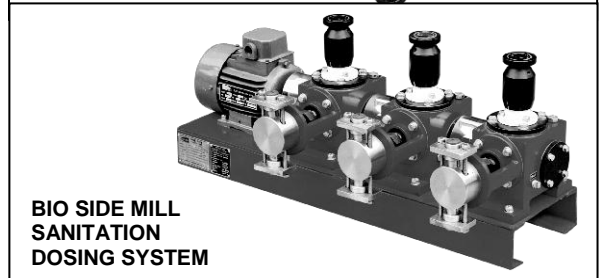

**BIO SIDE MILL
SANITATION
DOSING SYSTEM**

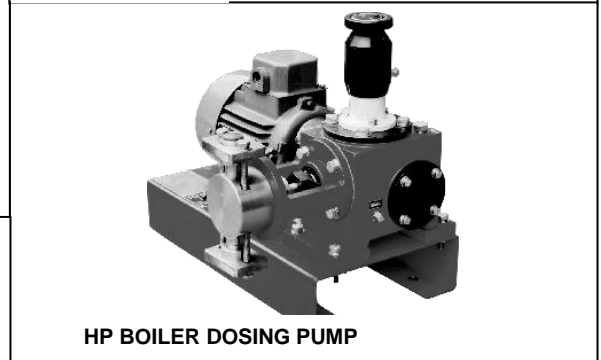

HP BOILER DOSING PUMP

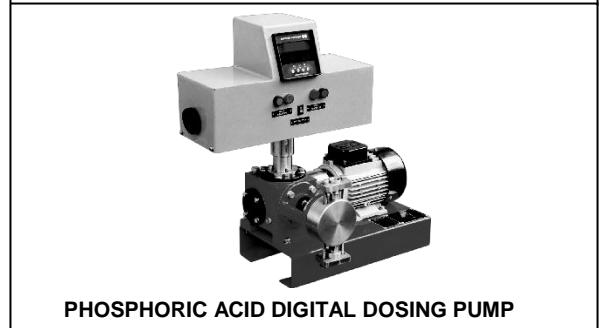

PHOSPHORIC ACID DIGITAL DOSING PUMP



**ANTISCALENT
DOSING SYSTEM**



DOSING PUMPS & SYSTEMS

PHOSPHORIC ACID DIGITAL DOSING PUMP:

"INDO PUMP" BRAND PHOSPHURIC ACID DOSINGPUMP WITH MOTOR



TECHNICAL SPECIFICATIONS:

BRAND : **INDOPUMP**
Model : IP2017
Capacity : 0 to 200 LPH
Pressure : 5 Kg/Cm² Max.
Type : Plunger Type
Wetted Parts : S.S.316

ACCESSORIES:

- Motor: 1 H.P. / 3 Phase STD TEFC Make Ashwa/Link servo : 1 No.
- Connection: 1" BSP with suction & delivery with base frame, coupling and coupling guard: 1 No.
- Strainer: S.S.316 "Y" type 30 Mesh: 1 No
- Nipples: S.S.316 1" 3 BSPf: 3 Nos.
- Anti Syphosing Valve: S.S.316: 1 No.
- Starter: D.O.L. – C G Make: 1 No.
- Metering Tank: 1000 Ltr Capacity: 1 No.
- Flow Valve: Anti Syphoning Valve S.S. 3

FLOCCULENT DOSING SYSTEM:

"INDO PUMP" BRAND
PHOSPHURIC ACID DOSING SYSTEM WITH M

TECHNICAL SPECIFICATIONS:

BRAND: INDOPUMP


Model: IPSYSELECT3005 No

Capacity: 0 to 500 LPH (Available as per require)

Pressure: 5Kg/Cm² Max.

Type: Plunger type

Wetted Parts: S.S.316

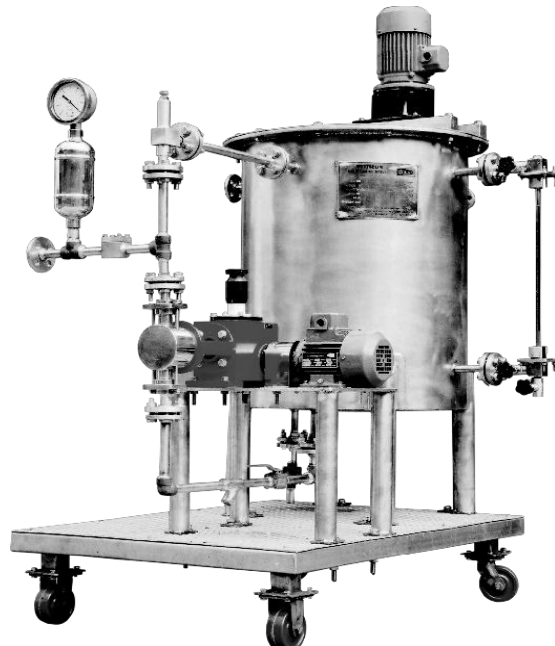

ACCESSORIES:

- Motor: 2 H.P.3 Phase STD TEFC: 1 No
- Connection: 1" BSP with suction & delivery with base frame, coupling & coupling guard & pump stand: 1 No
- Suction strainer: S.S.316: 3 Nos



INDO PUMP


Manufacturers of Pumps & Pump Spares.

- Nipple: S.S.316 1" BSP: 9 Nos
- Hose Clip ½": 9 Nos
- Breaded pipe suitable length for suction side (Rates per Mtr. only): 3 Nos
- Breaded pipe suitable for deliver (Rates per Mtr. Only) : 3 Nos
- Water / dust protective motor cover: 1 No
- Metering Tank HDEX-200 Ltr Capacity with fabricated stand
- Level gauge & close Top cover: 1 Unit
- Vacuum control valve – S.S.316: 1 No

BIO SIDE MILL SANITATION DOSING SYSTEM:

"INDO PUMP" BRAND
MILL SANITATION DOSING COMPLETE SYSTEM.

A "INDO PUMP" Brand Mill Sanitation Dosing Pump with Triple Head Dosing arrangement for three individuals mill with different Dosing Capacity.

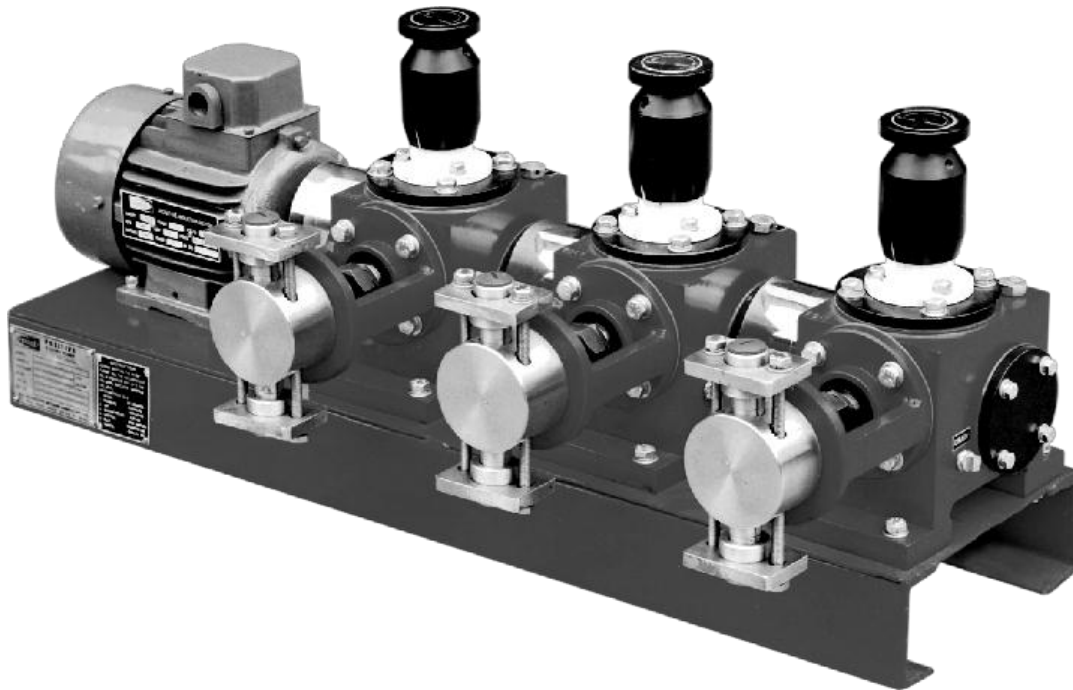

TECHNICAL SPECIFICATIONS:

Model: IP-1011/3HD-TRIPLEX
Capacity: 0 to 20 LPH each pump: 1 No.
Pressure: 5 Kg/Cm² Max
Type: Plunger Type




ACCESSORIES:

- Motor: 0.5 H.P. 3 Phase STD TEFC: 1 No
- Connection: ½" BSP with suction & delivery with base frame, coupling & coupling guard & pump stand: 1 No
- Suction strainer: S.S.316: 3 Nos
- Nipple: S.S.316 ½" BSP: 9 Nos
- Hose clip: ½": 9 Nos
- Braided pipe suitable length for suction side (Rates per Mtr. Only): 3 Nos
- Braided pipe suitable for delivery (Rates per Mtr. Only): 3 Nos
- Water / Dust protective motor cover: 1 No
- Metering Tank HDEX – 200 Ltr Capacity with fabricated stand: 1 No
- Level gauge & close Top Cover: 1 Unit
- Vacuum control valve – S.S.316 (for Antiscalent): 3 Nos

BOILER FEED WATER TREATMENT CHEMICAL DOSING SYSTEM:

"INDO PUMP" Brand

Skid Mounted Chemicals Dosing Complete System. For Boiler Feed Water Treatment Chemicals Dosing.

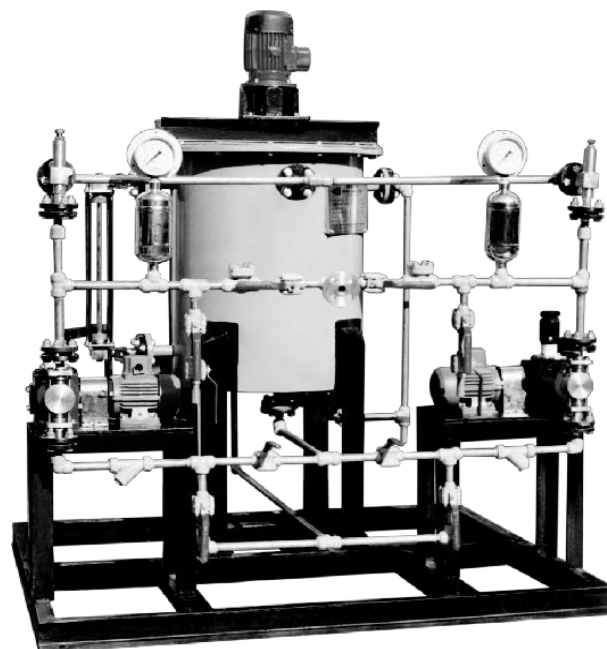



INDO PUMP

Manufacturers of Pumps & Pump Spares.

TECHNICAL SPECIFICATIONS:

- METERING TANK: 760X900X3 mm, M.O.C.**
M.S.400 Litres capacity, I.D. & O.D. coated with anticorrosive rubberized epoxy compound MC701, Hinged cover: 1 No
- HIGH SPEED MOTORIZED AGITATOR:**
S.S.304 quality material, Model PFC 5-4, 0.5 H.P.Motor 1500 RPM STD TEFC, Make :- Link / Ashwa.: 1 No.
- PRESSURE SAFETY VALVES:**
S.S.304, quality material Make: - Indo Pump: 1 No.
- "Y" TYPE STRAINER:**
30 mesh S.S.304, Make: - "Indo Pump" if L.P.Dosing 10 Kg / Cm² Max, if H.P.Dosing 75 Kg/ Cm³ Max: 1 No
- LEVEL GAUGE:**
Tabular glass type, 700 c/c S.S.304 wetted parts Make :- Sigma Instrument/Teleflow/Any STD: 1 No
- VALVE:**
20mm NB, 800 Psi, S.S.304, SW 3 PC ball Valve Make: - Valves India/BDK/Any other STD. Make: 3 Nos
- FLANGES:**
20mm, 150 Psig, SWEF, S.S.304 quality
- FITTINGS:**
20mm NB, 300 Psi forged S.W.S.S.304
- PIPES:**
20mm NB, SCH 40, S.S.304, On SUC & Disc
- PRESSURE GAUGE:**
0 to 16 Kg / Cm², 100 mm dia pressure gauge Make any STD.:1 No
- NON-RETURN VALVES:** Cum back pressure valves, S.S.304: 1 No.

ANTISCALENT DOSING SYSTEM:

"INDO PUMP" BRAND ONLY UNDER VACUUM ANTISCALENT DOSING SYSTEM BY ONE MOTOR TO = 3 PAN BODY CHEMICAL DOSIN FOR 1200 TO 8000 TCD PLANT.

TECHNICAL SPECIFICATIONS:

BRAND: INDO PUMP

Model: POSANT0604

Capacity: 0 to 20 LPH each pump

Pressure: 10 Kg / Cm² Max

Type: Plunger type

Wetted parts: S.S.316

ACCESSORIES:

SAME AS MILL SANITATION DOSING PUMP

Light duty, Electronic Antiscalent Dosing Pump.



HP BOILER DOSING PUMP:



INDO PUMP

Manufacturers of Pumps & Pump Spares.

PLUNGER TYPE METERING PUMPS
FOR HIGH PRESSURE DOSING SYSTEM.

TECHNICAL SPECIFICATIONS:


Model: INDO PUMP 5011-HP
Capacity: 0 to 20 LPH
Pressure: 100 Kg / Cm² Max
Wetted Parts: S.S.316
Motor: 0.5 to 1 H.P. as per
H.P.Boiler Pressure Requirement
STD TEFC with coupling guard base
frame and ½" suction delivery connecti

LP BOILER DOSING PUMP:

PLUNGER TYPE METERING PUMPS
FOR LOW PRESSURE DOSING SYSTE

TECHNICAL SPECIFICATIONS:

Model: INDO PUMP – 1011-LP
Capacity: 0 to 50 LPH
Pressure: 10 Kg / Cm² Max.
Wetted Parts: S.S.316
Motor: 0.5 HP STD / TEFC with
coupling & coupling guard base frame
with ½" suction discharge connection s

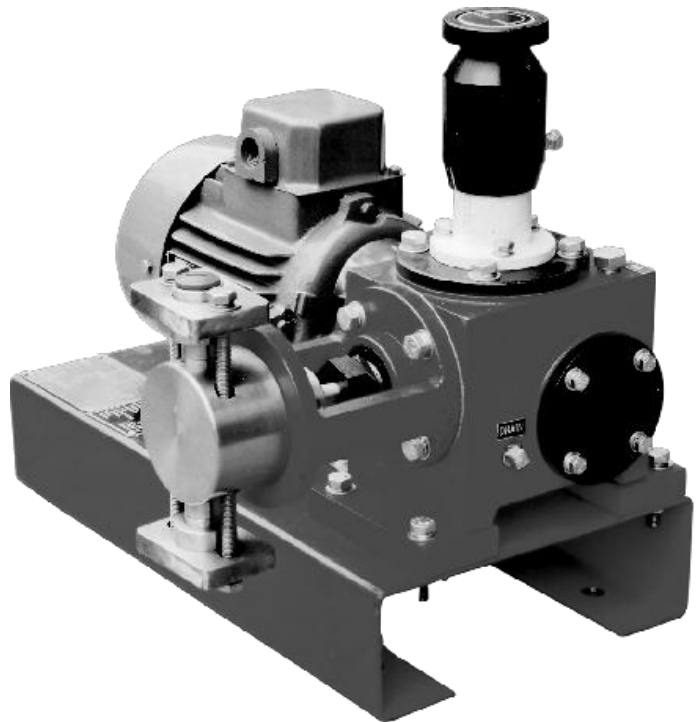

L.P. HYDRO TESTING SYSTEM:

"INDO PUMP" BRAND 50 Kg / Cm² HYDRAULIC

TECHNICAL SPECIFICATIONS:

BRAND: INDO PUMP

Model: IP 2017 L.P.
Capacity: 200 LPH
Pressure: 50 Kg / Cm² Max
Type: Plunger Type
Wetted Parts: S.S.304

ACCESSORIES:

- Motor: 0.5 H.P. / 3 Phase
STD TEFC Make Ashwa/Link Servo: 1 No
- Connection: ½" BSP with suc. & del. With
base frame, coupling and coupling guard: 1 No
- Strainer: S.S.304 "Y" Type 30 Mesh: 1 No
- Starter: D.O.L. – C G Make: 1 No
- Shut Up Valve: S.S.304: 1 No
- High pressure hose: Suitable for above: 1 No
- High Pressure Gauge: 0 to 100 Kg / Cm² Capac





INDO PUMP

Manufacturers of Pumps & Pump Spares.

- Pressure Safety Valve: 0 to 100 Kg / Cm²: 1 No
- Four wheel trolley for above if required by you: 1 No

H.P. HYDRO TESTING SYSTEM:

"INDO PUMP" BRAND
100 Kg / Cm² Hydraulic testing
Pump with motor.

TECHNICAL SPECIFICATIONS:

BRAND: INDOPUMP

Model: IP 2017 H.P.

Capacity: 100 LPH

Pressure: 100 Kg / Cm² Max

Type: Plunger type

Wetted Parts: S.S.304

ACCESSORIES:

- Motor: 1 H.P. / 3 Phase STD TEFC Make Ashwa/ Link servo: 1 No
- Dampener: S.S.304 MOC: 1 No
- Connection: with base frame, coupling and coupling guard S.S.304 "Y" Type 30 Mesh D.O.L.-C G Make:1 No
- Strainer: S.S.304: 1 No
- Starter: Suitable for above: 1 No
- Shut up Valve: 0 to 100 Kg / Cm² Capacity: 1 No
- High Pressure Hose: : 0 to 100 Kg / Cm² : 2 No
- High Pressure Gauge:1 No
- Pressure safety valve:1 No
- Four Wheel Trolley for above if required by you: 1 No

NOTE: HIGH PRESSURE HYDRO TEST SYSTEM AVAILABLE UPTO 400 Kg / Cm²